


ASSEMBLY INSTRUCTIONS

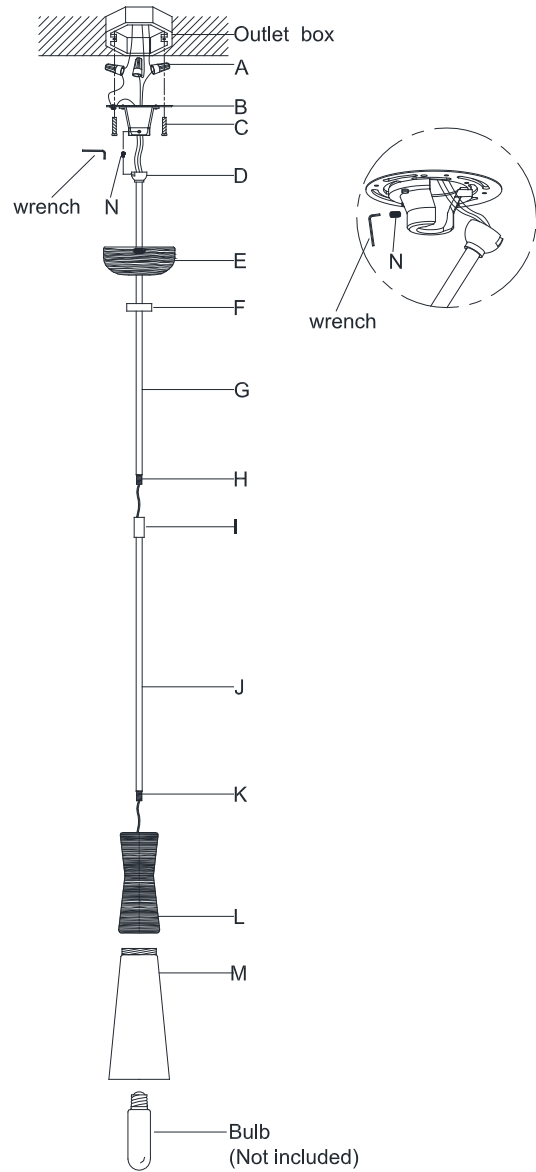

Utopia Small Pendant

Item # KW 5531

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
 2. Let the tube (J) pass through the threaded nipple (K), then thread the threaded nipple (K) to the fixture body (L) and secure with connector (I).
 3. Let lock collar (F) and canopy (E) go through the tube (J).
 4. Let the tube (G) pass through the threaded nipple (H), then thread the threaded nipple (H) to the connector (I) and secure with metal ball (D).
 5. Install the mounting plate (B) to the outlet box by using mounting screws (C).
 6. Hang the ball (D) to the center of mounting plate (B) and secure with set screws (N) by the wrench.
 7. Measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
 8. Connect the fixture Ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
 9. Connect the fixture Neutral (ribbed, no markings) wire with the neutral wire from the outlet box using wire nut (A).
 10. Connect the fixture Hot (smooth edge, markings) wire with the hot wire from the outlet box using wire nut (A).
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Tuck these wire connections neatly into the outlet box to secure.



VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

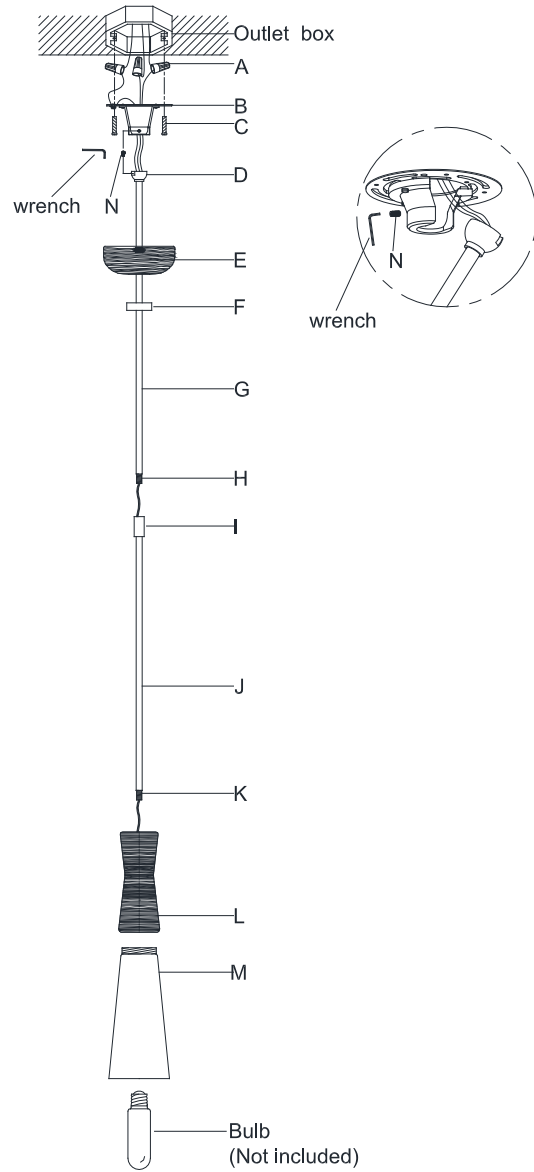

Utopia Small Pendant

Item # KW 5531

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

-
12. Put canopy (E) to the ceiling and secure with lock collar (F).
 13. Thread the glass shade (M) to the fixture body (L).
 14. Insert bulb (not included) into the socket.
 15. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

